VoiceClip 310

Bluetooth Headset

Overview

User Guide

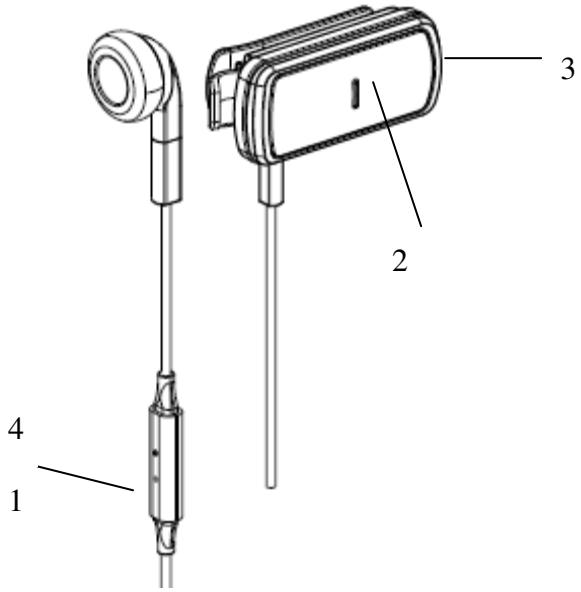

1. Multi-function Button (MFB)
   - Power On / Off
   - Pair with mobile phone
   - Answer / End a call
2. Status Indicator
3. USB Charging Socket
4. In-line Microphone

Charging Your Headset

The headset comes with a built-in rechargeable battery. Prior to using the headset for the first time, it is recommended to fully charge the battery.

Insert the charger's plug into the headset's USB charging socket and plug the mains charger to an AC wall outlet or plug to the PC/notebook.

Use only the supplied charger / USB charging cable to charge the headset.

Headset Status	Status Indicator Light
• Charging (OFF MODE)	• Solid red

• Fully charged (OFF MODE) • Low battery	• Off • Flash red with short beep every minute

♦ 3 hours are required to fully charge the headset.

*Warning: Do not use the headset while it is connected to the charger.

Pairing Your Headset with a Bluetooth Mobile Phone

1) Ensure the headset is off.

2) To activate the pairing mode, press and hold the headset's MFB for 8 seconds without releasing your finger until its status indicator flashes blue and red alternately.

3) Activate your mobile phone's Bluetooth, search Bluetooth devices, select "VoiceClip 310" and enter the passcode "0000". When the pairing is completed, the headset's status indicator will flash blue rapidly 5 times and you can hear a long beep.

Basic Operation

Function	Button	Beep / Buzzer	Status indictor
POWER ON	Press and hold the MFB for 2 seconds	Short beep	Flash blue light 3 times
When you turn on your headset for the first time, the headset proceeds into pairing mode, i.e. the status indicator flashes blue and red alternately, so that you can immediately pair it with your mobile phone.			
POWER OFF	Press and hold the MFB for 2 seconds	Long beep	Red light for 2 seconds
Incoming call		Ringtone through the earphone and buzzer ON	Blinking purple
Answer / End a call	Press the MFB once		

i.Tech Bluetooth headset is designed to work with Bluetooth devices. Due to large variability between different Bluetooth devices from different manufacturers, interoperability between the headset and all Bluetooth-enabled products is not guaranteed.

Product Specifications

Bluetooth Specification: v2.1 + EDR Class 2

Bluetooth Profiles Supported: Headset, Handsfree
Range of Frequency: 2.4GHz spectrum
Nominal Charging Time: Within 3 hours
Talk Time*: Up to 6 hours
Standby Time*: Up to 145 hours
Dimensions: 41.5(L) x 19.5(W) x 10.5(T) mm/
1.63(L) x 0.77(W) x 0.41(T) inches
Weight: 14 grams / 0.88 ounces
* may vary due to the user's habit, different modes of operation, and mobile phone settings.

Detail Operation

Indicator Light

Headset Status	Status Indicator Light
• Low battery • Out of battery • Out of Range	• Flash red with short beep every minute • The light turns off • Steady on purple for 3 sec every 15 sec and then same as standby

If the pairing cannot be completed within 3 minutes after the pairing mode has been activated, the headset's status indicator will flash blue rapidly 5 times and you can hear 3 short beeps. Then the headset turns off. Repeat steps 1 to 3 to pair both devices again.

Voice Dialing*	In Standby Mode, press MFB once	Short beep	
Say the voice tag as soon as you hear the short beep and you must have recorded the voice tag into your mobile phone.			
Last no. Redial*	In Standby mode, double click MFB		
Call Transfer (mobile phone to headset)*	In Talk mode, double click MFB once		
Call Waiting allows you to hold up the current caller and pick up the second caller. To pick second call, press MFB once. To swap call, double press MFB. To terminate current and swap to second call, press MFB once.			

Resetting Your Headset / Removing the Pairing History

You may reset the headset to its default settings. Resetting will also remove the pairing history of your headset with the mobile phone.

1. During OFF mode, hold the MFB key and plug charging cable into the charging socket.
2. Release the MFB.
3. The status indicator will stay red and the headset is reset.

You may also reset the headset to its default settings by hardware reset.

1. Plug charging cable into the charging socket